

外形尺寸 / Dimension(mm)

形状 Style	直引线型		引线弯曲型	
Cap 范围 Cap range	450V. dc	104~225	F= 5.0	104~105
			F= 7.5	104~394
			F=10.0	104~394
			F=15.0	474~225
	630V. dc	104~225	F= 5.0	104~105
			F= 7.5	104~105
			F=10.0	104~105
			F=15.0	104~105
			F=17.5	125~225
			F=22.5	125~225


编带仕样的引线尺寸 (F)，请参照第27~29页的编带尺寸表。

For a pitch space(F) of the taping specification, refer to "Taping dimensions" on page 27~29.

Cap COD E	Cap (μ F)	标准包装数 Number of pieces for packing unit										
		MPX 450V.dc						编带 Taping	直脚品 Long		引线弯曲型 Formed	
		W	H	T	P	F	Φ d		Ammo	Bag	Box	Bag
104	0.10	13.0	8.3	5.0	10.0	5.0/7.5/10.0	0.6	500	100	1,000	100	1,000
124	0.12	"	8.5	5.3	"	"	"	"	"	"	"	"
154	0.15	"	9.0	5.6	"	"	"	"	"	"	"	"
184	0.18	"	9.5	6.0	"	"	"	400	"	"	"	"
224	0.22	"	9.9	6.4	"	"	"	"	"	"	"	"
274	0.27	"	10.4	6.9	"	"	"	"	"	500	"	500
334	0.33	"	11.1	7.5	"	"	"	300	"	"	"	"
394	0.39	"	11.5	8.0	"	"	"	"	"	"	"	"
474	0.47	18.0	10.0	6.8	15.0	5.0/7.5/10.0/15.0	"	400	"	"	"	"
564	0.56	"	10.6	7.5	"	"	"	300	"	"	"	"
684	0.68	"	11.2	8.0	"	"	0.8	"	"	"	"	"
824	0.82	"	11.9	8.6	"	"	"	"	"	"	"	"
105	1.0	"	12.5	9.1	"	"	"	"	"	"	"	"
125	1.2	18.3	14.6	9.5	"	7.5/10.0/15.0	"	"	50	300	50	300
155	1.5	"	15.7	10.6	"	"	"	"	"	"	"	"
185	1.8	"	16.5	11.5	"	"	"	200	"	200	"	200
225	2.2	"	17.8	12.6	"	"	"	"	"	"	"	"

Cap COD E	Cap (μ F)	MPX 630V.dc						标准包装数				
								Number of pieces for packing unit				
		W	H	T	P	F	Φ d	编带 Taping	直脚品 Long		引线弯曲型 Formed	
							Ammo	Bag	Box	Bag	Box	
104	0.10	18.3	9.0	5.8	15.0	5.0/7.5/10.0/15.0	0.6	500	100	500	100	500
124	0.12	"	9.3	6.1	"	"	"	"	"	"	"	"
154	0.15	"	9.9	6.8	"	"	"	400	"	"	"	"
184	0.18	"	10.6	7.4	"	"	"	"	"	"	"	"
224	0.22	"	11.6	7.6	"	"	"	"	"	"	"	"
274	0.27	"	12.1	8.1	"	"	"	300	"	"	"	"
334	0.33	"	12.7	8.8	"	"	0.8	"	"	"	"	"
394	0.39	"	13.4	9.3	"	"	"	"	"	"	"	"
474	0.47	"	14.7	9.8	"	"	"	"	50	300	50	300
564	0.56	"	15.5	10.8	"	"	"	200	"	"	"	"
684	0.68	"	16.7	11.7	"	"	"	"	"	200	"	200
824	0.82	"	17.7	12.6	"	"	"	"	"	"	"	"
105	1.0	"	19.8	13.1	"	"	"	"	20	100	20	100
125	1.2	25.5	18.0	11.5	22.5	17.5/22.5	"	"	"	"	"	"
155	1.5	"	19.3	12.8	"	"	"	"	"	"	"	"
185	1.8	"	20.7	14.0	"	"	"	"	"	"	"	"
225	2.2	"	22.0	15.5	"	"	"	"	"	"	"	"

MPX 450V

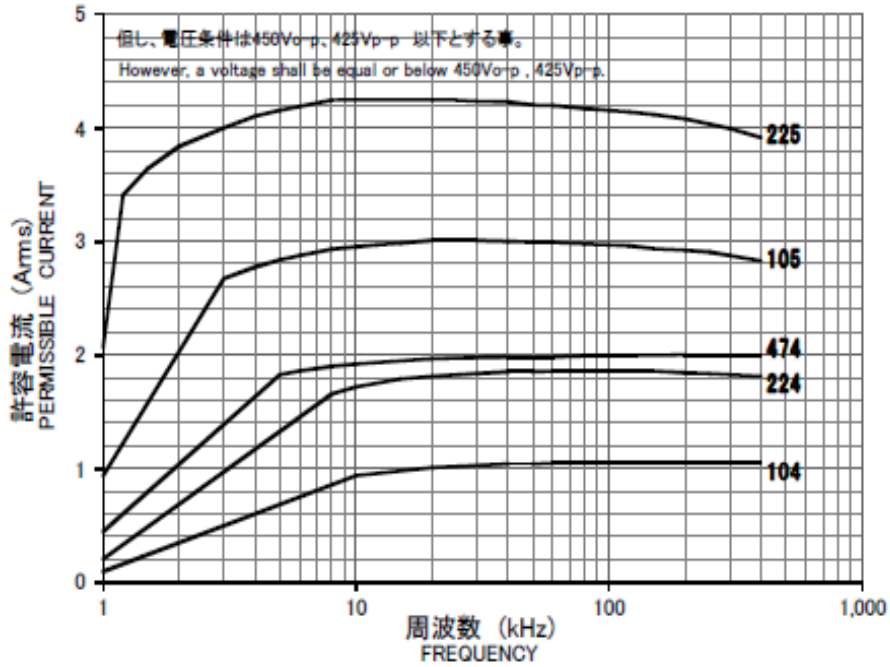

MPX 630V

